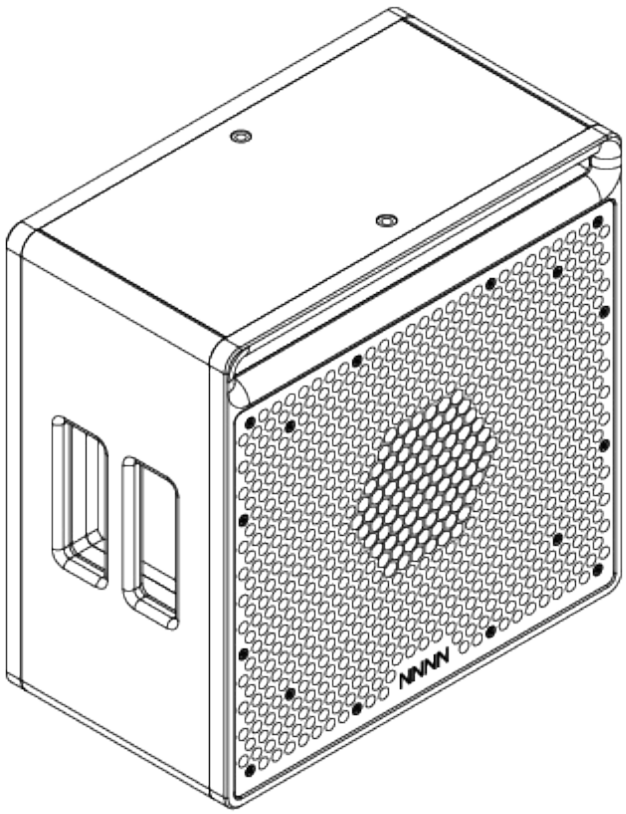


GAGE 60A

Powered Coaxial Point Source

Owner’s Manual 1.0

NNNN

Version 1.0
Updated versions uploaded to www.nnnn.no

© 2023 by NNNN AS ; all rights reserved

Keep this document with the product or in safe storage so it is readily available if needed.

This document should accompany the
product if it is ever resold.

NNNN AS
Syretårnet 43, 3048 Drammen, Norway
T +47 982 89 816
info@nnnn.no

Contents

1	Safety Precautions	4
2	Gage 60	5
2.1	Product Description	5
2.2	Technical Specifications	5
2.3	Connections & Indicators	6
3	Configurations	7-8
4	Accessories	9
5	Declarations of Conformity	10

1 Safety

Personal injury

This box can be LOUD! Always be cautious when working with high output loudspeakers, do not stand in close proximity when driven at high volume. Even volume levels considered low can damage hearing with excessive continuous exposure.

When rigging your speakers, make sure that they are placed on a stable foundation. Whether they are flown, on a pole or placed on top of other equipment, take care to assure a mechanically stable set-up.

Only use the accessories provided by NNNN for flying the loudspeaker. Be mindful to check weight restrictions, safety guidelines and installation procedures for third party accessories used for installing.

Be careful to avoid pinching or carrying to much weight when transporting or deploying equipment.

Remember to check the loudspeaker regularly for any wear and tear and replace loudspeakers when necessary.

All load bearing bolts and fixtures must be checked regularly, and thread locking compound must be used where appropriate.

Material Damage

Loudspeakers contain magnets, they have some interesting properties that could be detrimental to other equipment in their vicinity. Hard drives, bank cards and video monitors can be damaged by being exposed to these magnets.

Do not put the speakers in water. Especially if they are plugged into power. Electricity and water do not always go well together.

Avoid installing the loudspeaker near heat sources such as stoves, radiators or direct sunlight.

Refer all servicing to qualified NNNN service personnel.

2 Gage 60

2.1 Product description

The Gage 60 is a horn-loaded coaxial point source with a ported low-frequency extension.

Compact, loud and clear.


The frequency response of the Gage 60 extends from 60Hz to 20kHz. Allowing stand alone use, or used with support from a subwoofer. Pairs well with the Devor series subwoofers, as well as Trada 30 and Trent 35. Visit www.nnnn.no for more information.


The cabinet is made of high quality birch plywood, coated with a durable textured paint. There are two M10 threaded inserts in the top of the cabinet for attaching the SMB:G60 mounting bracket.


On the sides of the cabinet there are handles for easy handling. The bottom side of the cabinet is equipped with a pole mounting flange that accommodates a Ø35mm pole.


2.2 Technical Specifications

Frequency response extended (-6 +3dB):	60-20 000Hz
Frequency response horn assisted (±3dB):	150-20 000 Hz
Max SPL average:	>125dB
Peak SPL music:	>140dB
Approx. Horizontal dispersion:	100°
Approx. Vertical dispersion:	60°



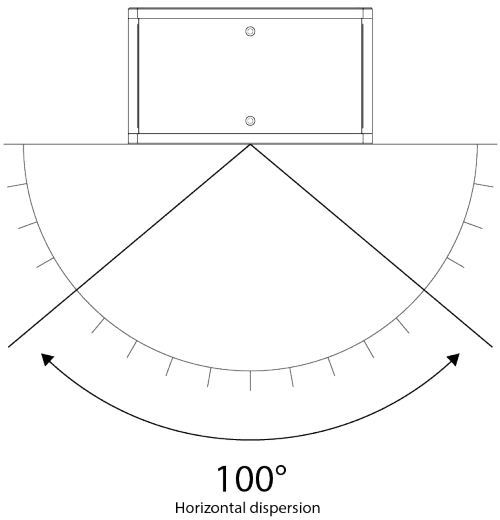

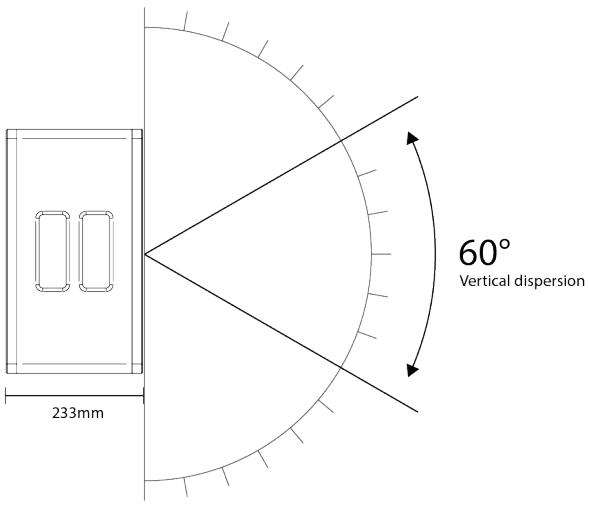


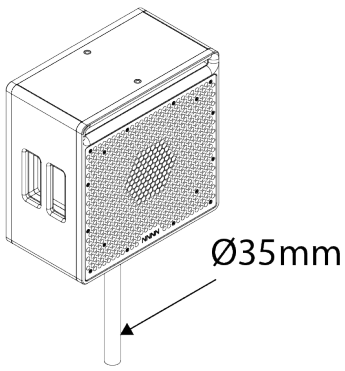


2 Gage 60

2.3 Connections & Indicators

The GAGE 60A has a single XLR Jack Combo input, and a XLR passthrough output. In addition there is a volume knob, power in and through and LED indicators displaying the state of the internal DSP.

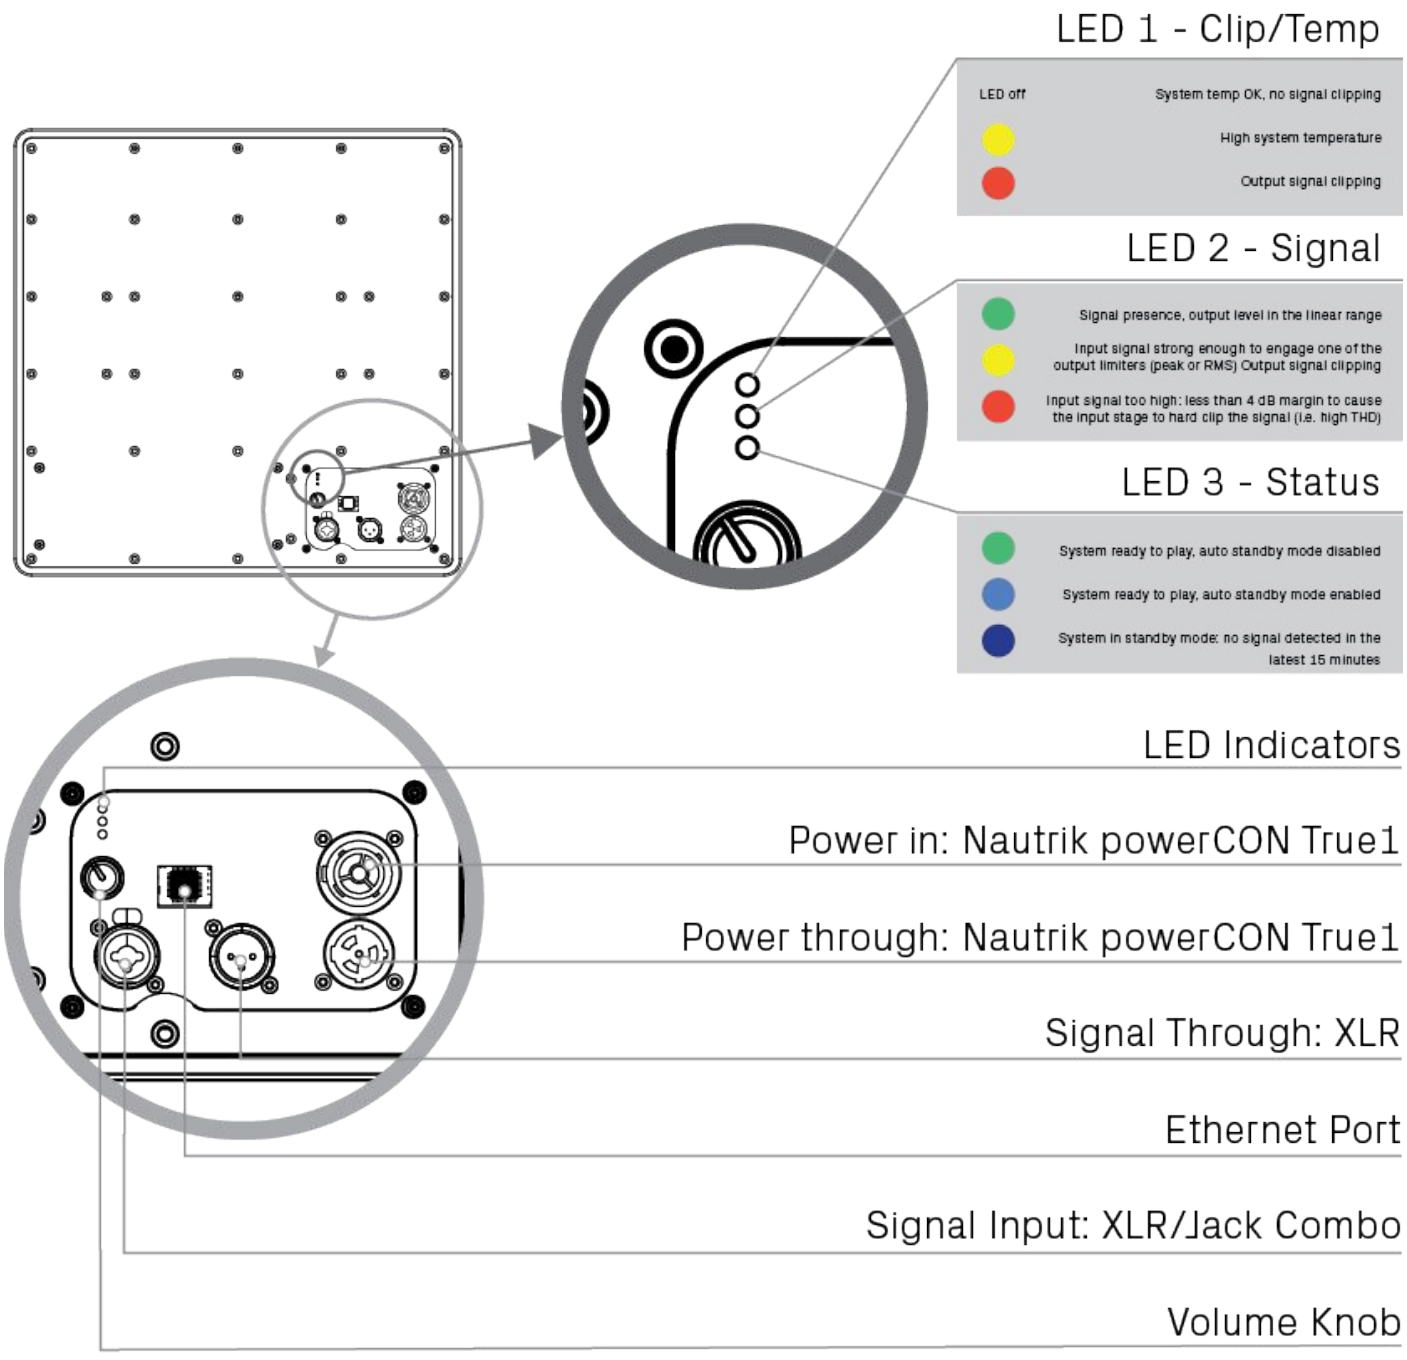


3 Configurations

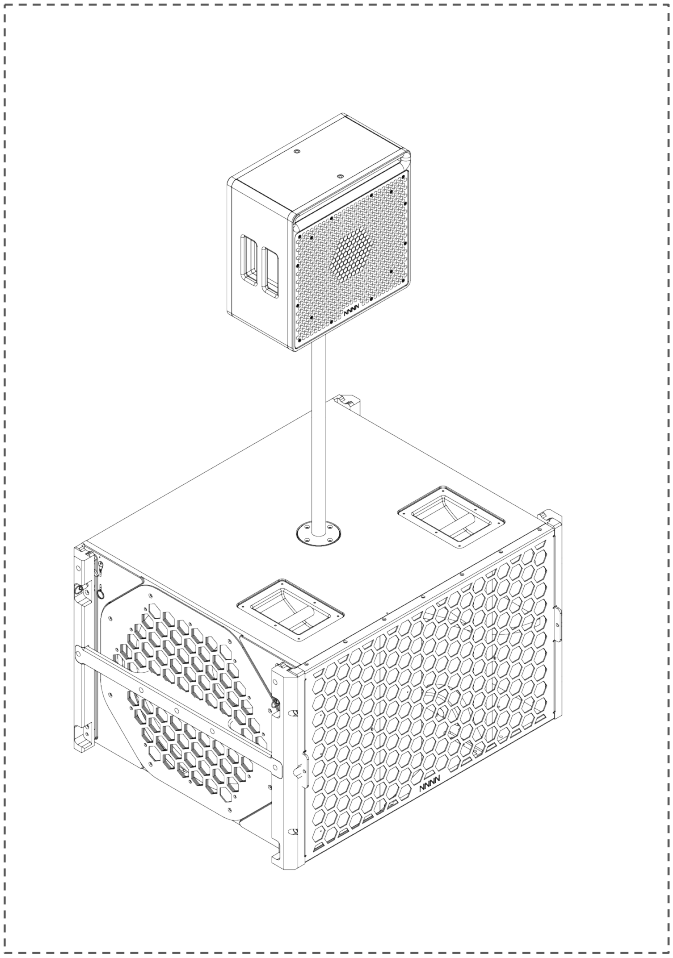

Gage 60 & Trada 30


Gage 60 paired with the Trada 30 offers a full range sound, with substantial bass energy.

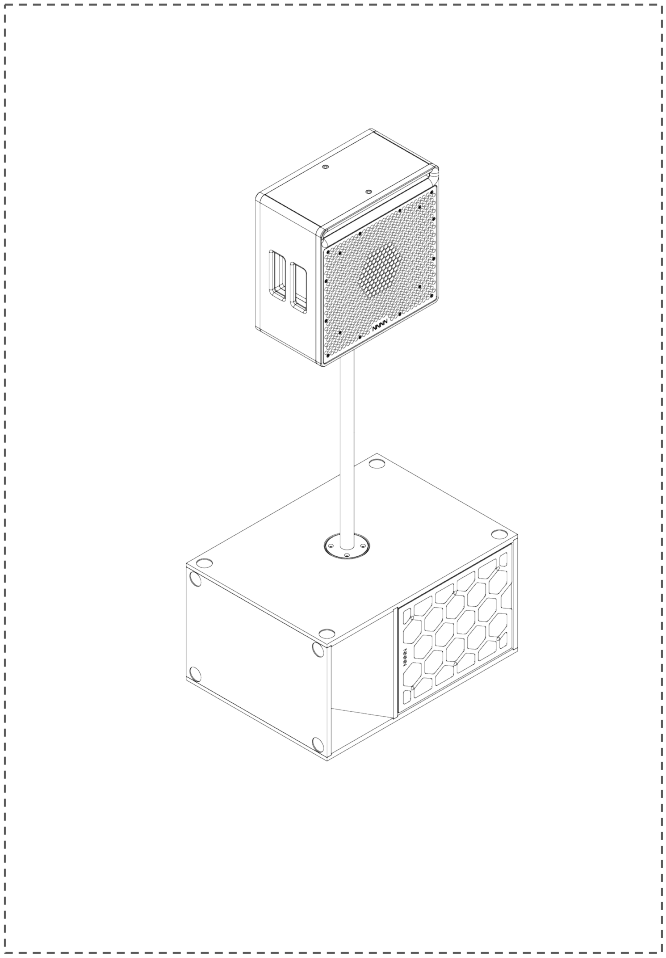

Gage 60 & Trent 35

Gage 60 paired with the Trent 35 offers a full range sound, in a compact and portable package.

3 Configurations

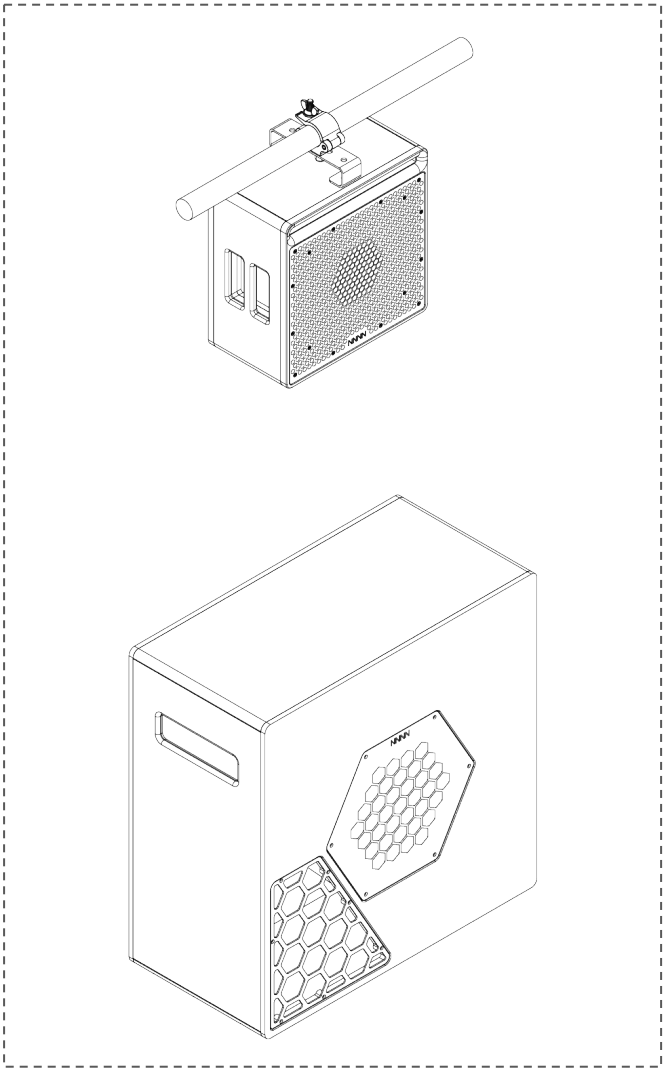

Gage 60 & Devor Series


Gage 60 paired with the Devor series subwoofers offer exceptional sound quality in a full range system.

4 Accessories

Protective cover

Protect your Gage 60 with the CVR:G60 Protective cover. Soft cover that leaves handles and pole mounting flange exposed for easy handling.

CVR:G60

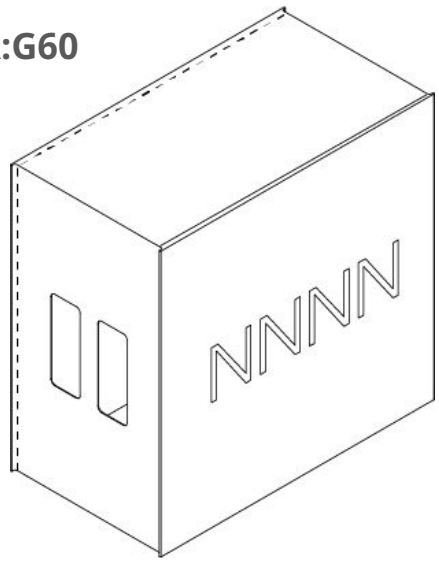


Mounting bracket


Gage 60 paired with the SFA:G60 Single Mounting Bracket accommodates ceiling suspension in a variety of angles. This is the recommended installation for permanent installs.

Tilt angles:
15°, 10°, 5°, 0°, +5°(upwards)

NB!
Use thread locking compound when attaching the SFA:G60 mounting bracket to ensure a secure installation.

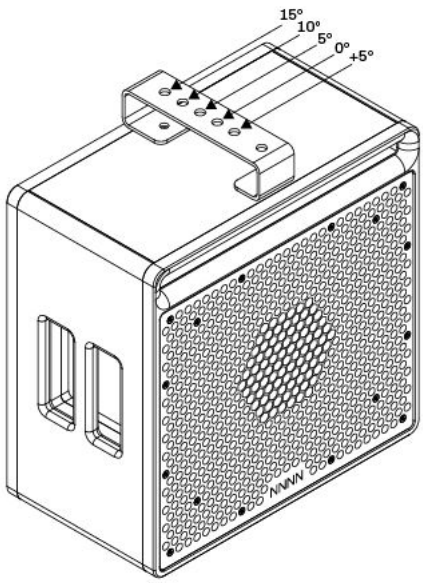

SFA:G60

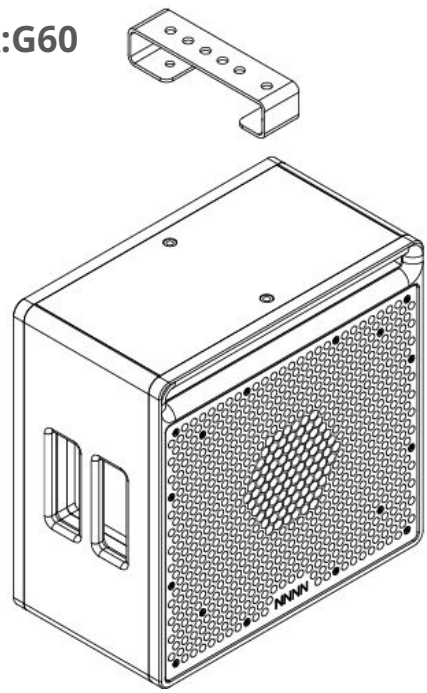

5 Declarations of Conformity

EU conformity

This declaration applies to the self powered loudspeakers manufactured by NNNN.

We declare that under our sole responsibility the products:
Model Names: Gage 60A
Intended use: Professional Audio

Are in conformity with the provisions of the following EC Directives, including all amendments, and with national legislation implementing these directives:

- 2006/95/EC Low Voltage Directive
- 2004/108/EC Electromagnetic Compatibility Directive
- 2002/95/CE RoHs Directive

The following harmonized standards are applied:

- EN 55103-1
- EN 61000-3-2
- EN 61000-3-3
- EN 55103-2
- EN 61000-4-2
- EN 61000-4-3
- EN 61000-4-4
- EN 61000-4-5
- EN 61000-4-6
- EN 61000-4-11 f EN 60065

Weee statement

The Waste Electrical and Electronic Equipment Directive (WEEE Directive) aims to minimise the impact of electrical and electronic goods on the environment.

In the unlikely event of an NNNN product being eligible for disposal, electrical and electronic equipment must be disposed of separately from normal waste at the end of its operational lifetime. Please dispose of this product according to the respective national regulations or contractual agreements. If there are any further questions concerning the disposal of this product, please contact NNNN.

Revision Log:

Revision	Description	Reason	Page	Date